

TECHNICAL SHEET

TECHNICAL DEPT.


Edition date: 2018-01-05



MODEL: APLIQUE ESTHER 2 S-3R CR ACLED CII IP44 1X15W 1000MM CM

CODE: E27282CI

DIMENSIONS OF PRODUCT:

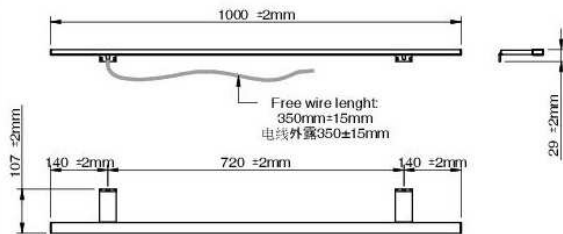

CRITERIA OF EXTERIOR ASPECT(RE-33033):

QUALITY OF POLISHED SURFACE:

SURFACES :


1- Support plate:



2- Top and side:



3- Front and bottom:



QUALITY SYMBOLS

▽ NORMAL

▽▽ GOOD

▽▽▽ VERY GOOD



MATERIALS AND DECORATIONS:

AL/PC Finish: Brigh chrome

FIXING TO SURFACE:

Wooden frame

BOXING

INSIDE	UNITS	MEASUREMENTS "mm"			WEIGHT "kg"	VOLUME "m3"	COMPONENTS
Box	1	0,035	0,135	1,03	0.84	0,004867	1 Applied 2 Square and accessories bag; 1 Instruction sheet 1 Led module installed in luminaire
OUTSIDE							
Lot box	10	0,195 x	0,29 x	1,045	9.2	0,059095	10 Individual boxes by batch
Palet	240	1,89 x	0,8 x	1,2	245.8	1,814400	24 Industrial boxes x 10 individual

MANUFACTURING REQUIREMENTS:

Minimum of production: 500 Un.

Delivery time: 55 Working days

SPARE

E17843-Junction box 2P IP44;E26055EI-UTE;E24915EI- Multi hooking bracket s2-4

ELECTRIC POWER

Nominal voltage	Power	Lamp holder	Lamp		Connexion to network
220-240V~50/60Hz	MAX 1X15W	LED		A+	Using junction box 2P IP44

STANDARIZATION AND CLASSIFICATION

		IP44				certificate n°
UNE-EN 60598				0,10m		LCZE17100034-EMC LCZS17100016-LVD

ILLUMINANCE AND LIGHT SOURCE

Light temp	life bulb	Lux		Direction of light
5700K	36000h	1) 1750		
	Lumens	2) 640		
	4) 1265	3) 314		

ECO DESIGN	
	Ecological impact value
	0,667